

KOMATSU®

WA250-6

WA
250

HORSEPOWER

Gross: 104 kW 140 HP / 2000 min⁻¹

Net: 103 kW 138 HP / 2000 min⁻¹

OPERATING WEIGHT

11245 – 11875 kg

BUCKET CAPACITY

1.8 – 2.7 m³



Photos may include optional equipment.

WALK-AROUND



ecot3
ecology & economy - technology 3



WA250-6

| | |
|-------------------------|---|
| HORSEPOWER | Gross: 104 kW 140 HP / 2000 min ⁻¹ |
| | Net: 103 kW 138 HP / 2000 min ⁻¹ |
| OPERATING WEIGHT | 11245 – 11875 kg |
| BUCKET CAPACITY | 1.8 – 2.7 m ³ |

HIGH PRODUCTIVITY & LOW FUEL CONSUMPTION

- Faster Travel & Lower Fuel Consumption
- Highly Efficient Hydrostatic Transmission (HST)
- Electronically-controlled HST with Variable Shift Control System
- Useful Functions Given by HST
- Variable Traction Control System
- Maximum Dumping Clearance and Reach

INCREASED RELIABILITY

- Komatsu Components
- High-rigidity Frames and Loader Linkage
- Wet Multiple-disc Brakes and Fully Hydraulic Braking System

EXCELLENT OPERATOR ENVIRONMENT

- Pillar-less Large Cab
- Great Rear Visibility
- Best Position for Comfort
- Easy-to-operate Loader Control Mono-lever

EASY MAINTENANCE

- Maintenance Accessibility
- Protective Guards
- Equipment Management Monitoring System
- Easy Radiator Cleaning

SAFETY

- ROPS/FOPS Cab (ISO 3471/ISO 3449)
- Rear-hinged Full Open Cab Door

KOMTRAX

- KOMTRAX

HIGH PRODUCTIVITY & LOW FUEL CONSUMPTION



Faster Travel & Lower Fuel Consumption

High performance SAA6D107E-1 engine

Electronic heavy duty common rail fuel injection system provides optimum combustion of fuel. This system also provides fast throttle response to match the machine's powerful tractive effort and fast hydraulic response.

Net: 103 kW 138 HP

Low emission engine

This engine is U.S. EPA Tier 3 and EU Stage 3A emissions certified, without sacrificing power or machine productivity.

Low fuel consumption

The high-torque engine and HST with maximum efficiency in the low-speed range provide low fuel consumption.

ECO indicator

The ECO indicator will inform the operator when the machine is maximizing fuel efficiency.



ECO indicator


Highly Efficient HST

Electronically-controlled HST with a variable pump and 2-motor system

Komatsu HST system allow a highly efficient and powerful operation. Increasing pump capacity and variable input torque control of new electronically controlled HST pump enable the engine to run at the best speed range and reduce fuel consumption.

The efficiency of HST motors

HST provides quick travel response and aggressive drive into the pile. The variable displacement system automatically adjusts to the tractive effort demand to provide maximum power and efficiency. When high drive torque is needed, both motors are engaged to provide highest torque. Maximum rim pull can provided from zero travel speed. This combination makes the loader very aggressive and quick at digging, climbing or initiating movement. When high travel speed is needed, clutch cuts off the low speed motor to eliminate drag and achieve excellent fuel efficiency.

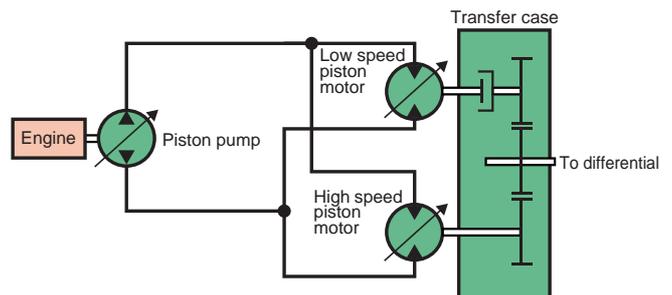


Electronically-controlled HST with Variable Shift Control System

Full auto-shifting

Full auto shifting eliminates any gear shifting and kick-down operation to allow the operator to concentrate on digging and loading.


Variable shift control system

The variable shift control system allows setting the top speed for increased safety and precision. The operator can choose between first, second, third or fourth maximum speeds by dialing the speed range selector switch. For v-cycles, the operator can set the speed control switch to 1 or 2, which provides aggressive digging, quick response and fast hydraulics. For load and carry, select 3 or 4 which still provides aggressive digging but with much faster travel speed.

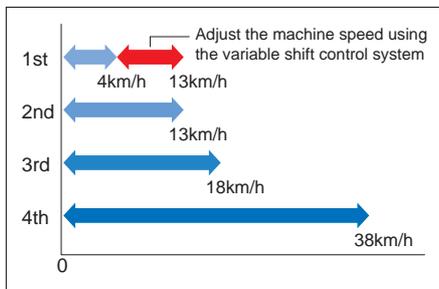

Variable and fine travel speed control

When the variable shift control switch is in 1st speed, ground speed can be adjusted between 4 km/h and 13 km/h with the fine control. This allows constant low driving speeds that are perfectly adjusted to applications such as lawn mowing or milling jobs.

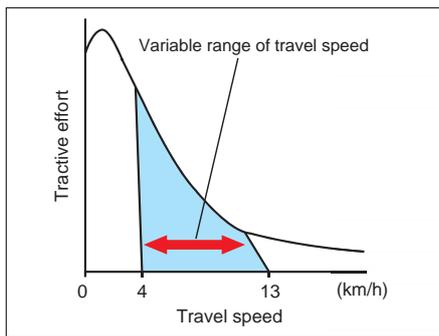

- 1 Speed range selector switch
- 2 Variable shift control switch

Useful Functions Given by HST

Self braking effect of the HST drive lines

The self braking effect of the HST drive line slows down the machine when the accelerator pedal is released. It can hold the loader in position on workable slopes, and it will be an advantage in stockpiling or ramp loading. Also it prevents uncontrolled rolling. Safety is greatly improved especially when working in confined spaces or inside industrial buildings. In addition, brake wear is practically eliminated.

Improved inching performance

Electronically controlled HST brake provides improved inching performance of the machine and demonstrates ideal braking control when the machine is travelling and working.

Accelerator pedal sensitive intelligent HST control

Finely-tuned HST control according to the accelerator pedal angle achieves variable clutch timing by machine speed and motor shift control in quick acceleration. It reduces shocks and allows smoother traveling and better energy-saving operation.



Overrun prevention system

Overrun prevention system will secure safety in downhill and protect the power train and brake components from overload. When the travel speed reaches 40 km/h, the caution lamp informs the operator to reduce the speed. When the machine descends a moderate slope (6 degrees or less), maximum travel speed is automatically limited to 42 km/h.


Notes: When the machine descends a steep slope, it is necessary to use the service brake to reduce the speed for safety.



Variable Traction Control System

The variable traction control system optimizes the digging traction automatically depending on working condition by controlling HST pump, motor and engine. Combined with the function of torque proportioning differentials, or optional limited slip differential this system exerts the following effects.

- Facilitates operation on soft ground where the tires of the machine are apt to slip.
- Eliminates excessive bucket penetration and reduces tire slippage during stockpile loading to improve the work efficiency.
- Reduces tire slippage to extend the life of tires. Furthermore, the maximum tractive effort can be adjusted in five stages while the traction control switch is ON. This allows the operator to select the optimum tractive effort for diversified road conditions.

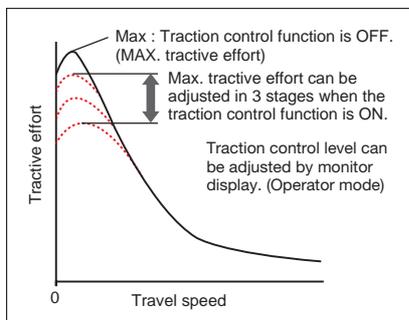

Traction control OFF (MAX) position


Traction control ON position

S-mode position




S-mode

Setting the switch to S-mode allows the machine to get the optimum driving force for operations on slippery road surfaces, like snow-removal on snow surface, resulting in reduced tire slippage and facilitation of the operation. Unexpected tire slippage on slippery road surface is suppressed by controlling the engine speed and HST motor when traveling at a low speed. (S-mode is effective only in forward traveling.)

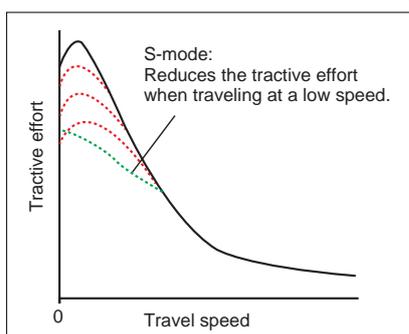

Max. traction switch

Max. traction switch is located on the work equipment control lever. When traction control switch is at ON position or S-mode is selected, pushing this switch cancels the setting of the traction control temporarily and increases the tractive effort to its 100% value. Then pushing the max. traction switch again or operating the F/R lever returns the tractive effort to the set value automatically. This switch is useful for operations such as piling up work where large tractive effort is required temporarily.

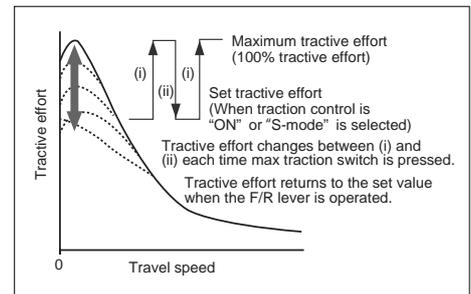


Max. traction switch




Maximum Dumping Clearance and Reach

The long lift arms provide high dumping clearances and maximum dumping reach. The operator can even level loads on the body of a dump truck easily and efficiently.

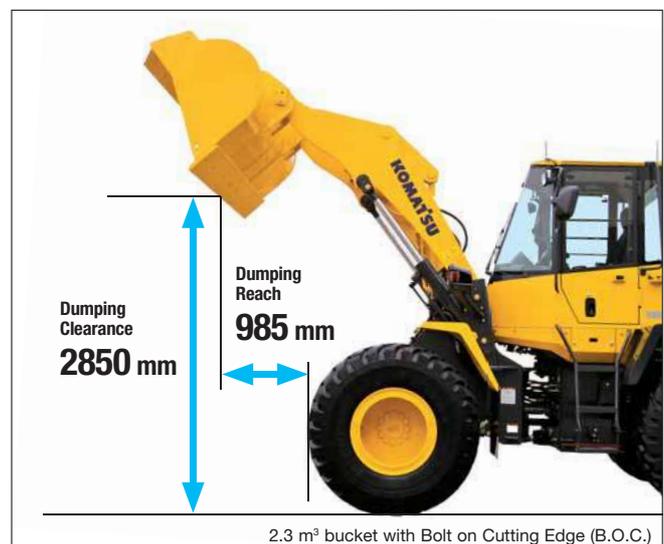


INCREASED RELIABILITY

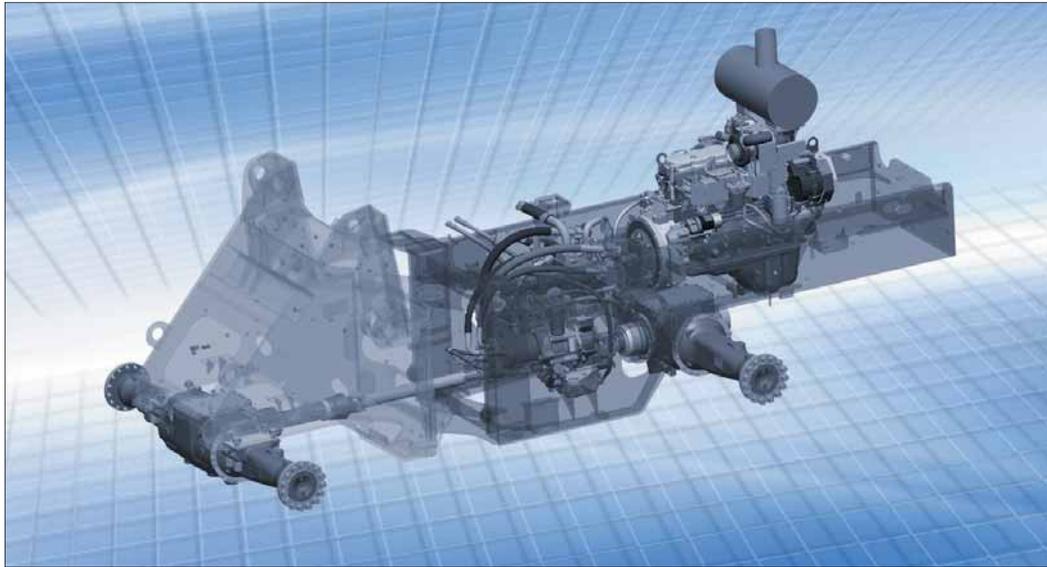

Komatsu Components


Komatsu manufactures the engine, transfer case and hydraulic components on this wheel loader. Komatsu loaders are manufactured with an integrated production system under a strict quality control system.

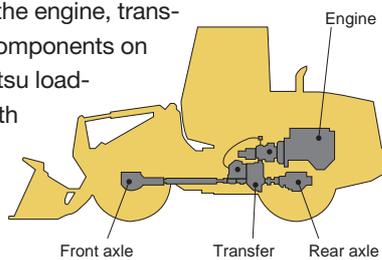

Wet Multiple-disc Brakes and Fully Hydraulic Braking System


This system result in lower maintenance costs and higher reliability. Wet multiple-disc brakes are fully sealed. Contaminants are kept out, reducing wear and resulting maintenance. Brakes require no adjustments for wear, meaning even lower maintenance. The parking brake is also an adjustment-free, wet multiple-disc for high reliability and long life. Added reliability is designed into the braking system by the use of two independent hydraulic circuits. Provides hydraulic backup should one of the circuits fail.

Fully hydraulic brakes mean no air system to bleed, or the condensation of water in the system that can lead to contamination, corrosion, and freezing.

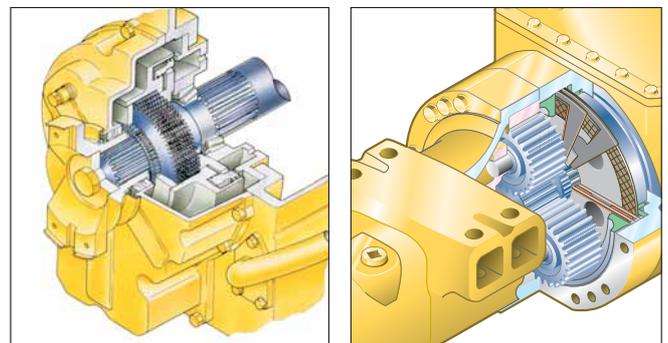

High-rigidity Frames and Loader Linkage

The front and rear frames and the loader linkage have got more torsional rigidity to provide resistance increased to stresses. Frame and loader linkage are designed to accommodate actual working loads, and simulated computer testing proves its strength.

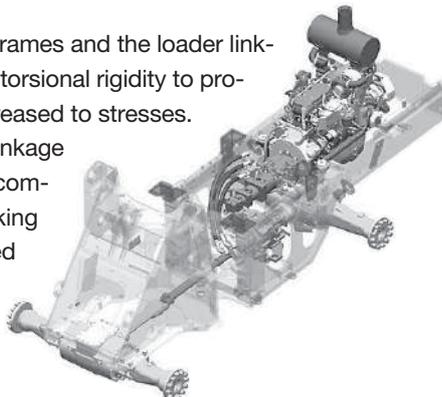


Sealed Connectors

Main harnesses and controller connectors are equipped with sealed connectors providing high reliability, water resistance and dust resistance.



Reliable Hydraulic Line

Flat face-to-face O-ring seals
Flat face-to-face O-ring seals are used to securely seal hydraulic hose connections and to prevent oil leakage.

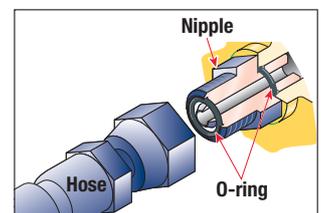

EXCELLENT OPERATOR ENVIRONMENT



The large space cab offers exceptional driver's comfort - comparable to a passenger car. The large, frameless window gives an unobstructed view of the bucket and tires while the slanted rear end ensures a clear view to the rear. The low-noise designed cab with the air-cushioned seat and the fully adjustable console inside allow the operator to work comfortably and productively over long period.


Pillar-less Large Cab

A wide pillar-less flat glass provides excellent front visibility. The wiper arm covers a large area to provide great visibility even on rainy days. The large cab area providing maximum space for the operator. The front mounted air conditioner (A/C) was introduced to increase seat reclining and backward slide adjustment.



Great Rear Visibility

Center lined muffler and air intake piping provides great rear right and left hand side visibility.

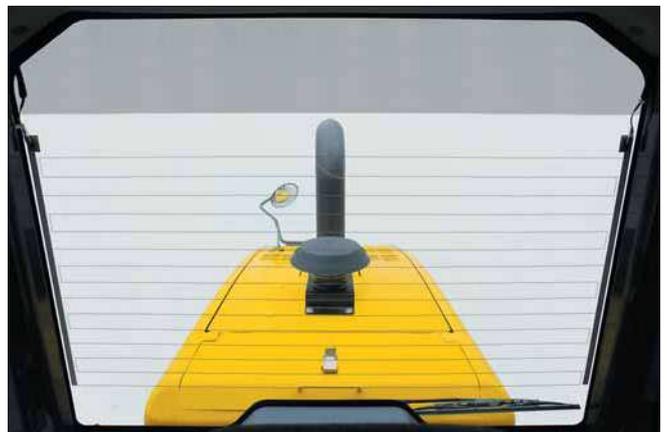

Best Position for Comfort

Tiltable steering column

The operator can tilt the steering column to provide a comfortable working position.




Adjustable wrist rest

The height of wrist rest is adjustable. It allows operators to adjust the controls to a comfortable position.



Low-noise Design

The large cab is mounted with Komatsu's unique ROPS/FOPS (ISO 3471/ISO 3449) viscous mounts. The low-noise engine, hydraulically driven fan, and hydraulic pumps are mounted with rubber cushions, and the cab sealing is improved to provide a quiet, low-vibration, dustproof with pressurizing, and comfortable operating environment.

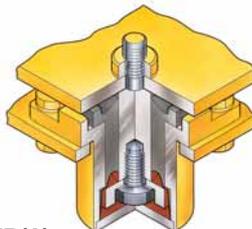

Operator's ear noise level: 70 dB(A)
Dynamic noise level (Outside): 104 dB(A)

Electronically Controlled Directional Lever

The operator can change direction with a touch of his fingers without removing his hand from the steering wheel. Solid state electronics makes this possible.



Easy-to-operate Loader Control Mono-lever

The new mono-lever using Proportional Pressure Control (PPC) allows the operator to easily operate the work equipment, to reduce operator fatigue and to increase controllability. The adjustable wrist rest provides the operator with a variety of comfortable operating positions.

Right-side Control Panel

The operator can easily select the speed range, maximum travel speed in 1st, tractive effort.



- 1 Loader control mono-lever
- 2 Speed range selector switch
- 3 Variable shift control switch
- 4 Traction control switch
- 5 Max. traction switch
- 6 Fan reverse switch


Options

12 V outlet

In addition to 24 V cigarette lighter, 12 V outlet is provided in the cab.

Electronically Controlled Suspension System

Electronically Controlled Suspension System uses an accumulator which absorbs some of the shock in the boom arm, giving the operator a much smoother ride. This reduces operator fatigue and reduces material spillage during load and carry operations. Electronically Controlled Suspension System operation is speed sensitive and turned off automatically below 5 km/h speed, meaning that the boom won't move during stationary digging.

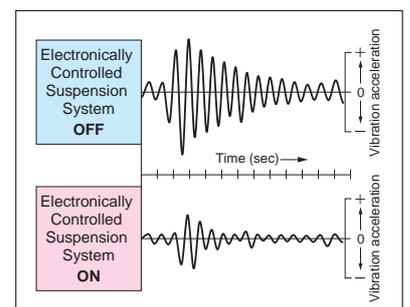

* Image is for illustration purpose

EASY MAINTENANCE



Gull-wing side doors upper locked position



Gull-wing side doors lower locked position

Maintenance Accessibility

Designed to save time

With long service intervals and best-in-class accessibility, the WA250-6 reduces the time and money you need to spend on maintenance. A gas spring helps the operator open and close each gull-wing side door for easy daily servicing. The doors open in two steps and be able to use upper or lower stop position as the situation demands.

Simple and convenient access to service

The service doors are designed as gull-wing doors. They allow you convenient and safe access to the daily service points from the ground.



Protective Guards

Thermal safety guards

Thermal guards for high temperature exhaust manifold are installed.



Rotating safety guards

Protective guards for rotating parts of the alternator and the air conditioner compressor are installed.



Equipment Management Monitoring System

Komatsu's new main monitor keeps the operator informed of all machine functions at a glance. The monitor is located behind the steering wheel and displays different machine functions including fluid/filter change intervals and troubleshooting memory display functions. The main gauges are analog type for easy viewing and other functions utilize lighted symbols or Liquid Crystal Display (LCD) readouts.

Maintenance control and troubleshooting functions

- **Action code display function:** If an abnormality occurs, the monitor displays action details on the character display at the bottom center of the monitor.
- **Monitor function:** Controller monitors engine oil level, pressure, coolant temperature, air cleaner clogging, etc. If controller finds abnormalities, the error is displayed on LCD.
- **Replacement time notice function:** Monitor informs replacement time of oil and filters on LCD when replacement intervals are reached.
- **Trouble data memory function:** Monitor stores abnormalities for effective troubleshooting.




- 1 Engine coolant temperature
- 2 Speedometer
- 3 Fuel gauge
- 4 HST oil temperature gauge
- 5 Character display
- 6 Inspection and maintenance items pilot lamp

Easy Radiator Cleaning


Hydraulic driven fan with reverse rotation

If the machine is operating in adverse conditions, the operator can reverse the hydraulic cooling fan from inside the cab by pressing a switch on the control panel.

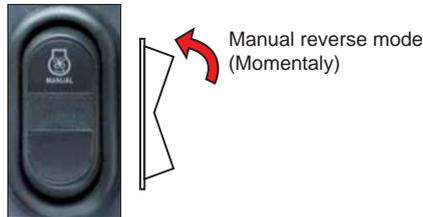

Automatic reversible fan (Optional)

The engine fan is driven hydraulically and can be operated in reverse automatically. When the switch is in the automatic position, the fan revolves in reverse for 2 minutes every 2 hours intermittently (Default setting).

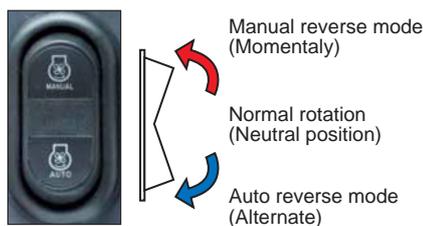

Hydraulic driven fan

Side-by-side cooling unit

The cooling system is isolated from the engine by a bulkhead to provide more efficient cooling and low noise. The radiator, air-to-air cooler and oil cooler are mounted side-by-side for more efficient cooling and easy cleaning. A fully-opening, gas spring assisted rear grille gives the operator excellent access to the swing-out fan and coolers.



Swing-out fan

Side-by-side cooling unit



ROPS/FOPS Cab

The ROPS/FOPS cab is standard for operator's safety. A wide pillar-less flat glass provides excellent front visibility, and a heated rear window provides excellent rear visibility in cold and freezing weather conditions.

ROPS (ISO 3471) : Roll-over Protective Structure

FOPS (ISO 3449) : Falling Objects Protective Structure



Rear-hinged Full Open Cab Door

The cab door hinges are installed to the rear side of the cab providing a large opening angle for the operator to enter and exit. The steps are designed like a staircase, so that the operator can get on and off the cab easily.



Alternate Exit of Cab

The door on the right side of the cab is provided as an alternate exit for use when the operator cannot get out through the door on the left side.

Other Safety Features

Two independent lines brake system

Added reliability is designed into the braking system by the use of two independent hydraulic circuits, providing hydraulic backup should one of the circuits fail.

Secondary steering (Optional)

If the steering pump is disabled, a secondary steering pump provides hydraulic flow.

Battery disconnect switch (Optional)

The battery disconnect switch is located in the right side battery box. This can be used to disconnect power when performing service work on the machine.

KOMTRAX

The Komatsu remote monitoring and management technology provides insightful data about your equipment and fleet in user-friendly format.

Energy Saving Operation Report


KOMTRAX delivers the energy-saving operation report based on the operating information such as fuel consumption, load summary and idling time, which helps you efficiently run a business.



This report image is an example of hydraulic excavator

Equipment Management Support

Through the web application, a variety of search parameters are available to quickly find information about specific machines based on key factors. Moreover, KOMTRAX finds out machines with problems from your fleet and shows you through an optimal interface.

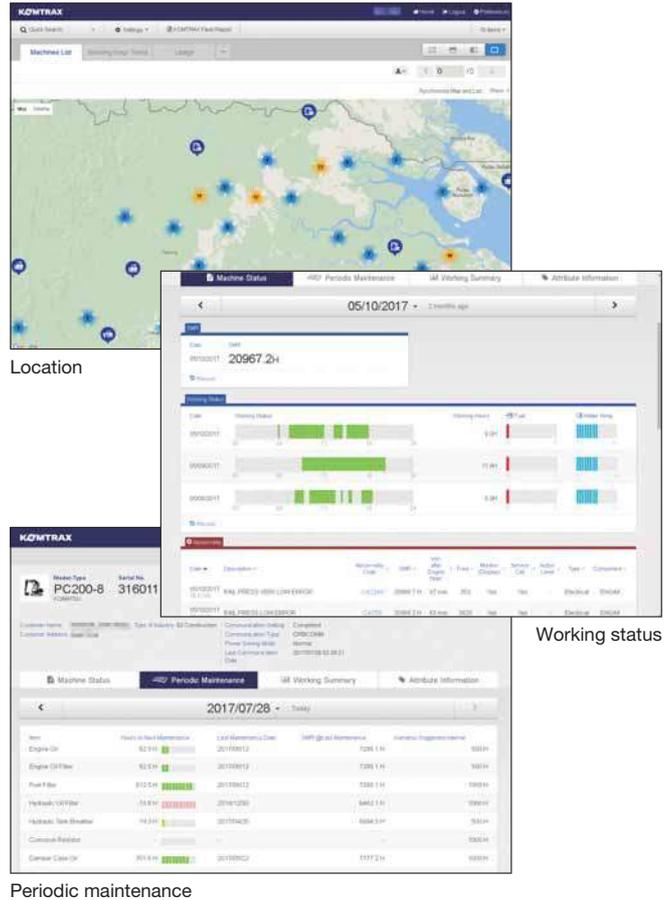

The report contents and data depend on the machine model.

Optimal Strategy for Efficient Work

The detailed information that KOMTRAX puts at your fingertips helps you manage your fleet conveniently on the web anytime, anywhere. It gives you the power to make better daily and long-term strategic decisions.



SPECIFICATIONS



ENGINE

Model Komatsu SAA6D107E-1
 Type..... Water-cooled, 4-cycle
 Aspiration Turbocharged, aftercooled
 Number of cylinders6
 Bore x stroke..... 107 mm x 124 mm
 Piston displacement6.69 L
 Governor All-speed, electronic
 Horsepower
 SAE J1995Gross 104 kW 140 HP
 ISO 9249/SAE J1349*Net 103 kW 138 HP
 Rated rpm..... 2000 min⁻¹
 Fan drive method for radiator cooling Hydraulic
 Fuel system.....Direct injection
 Lubrication system:
 Method Gear pump, force-lubrication
 Filter Full-flow type
 Air cleaner Dry type with double elements and
 dust evacuator, plus dust indicator

* Net horsepower at the maximum speed of radiator cooling fan is 100 kW
 134 HP.
 U.S. EPA Tier 3 and EU Stage 3A emissions certified.



TRANSMISSION

Transmission:
 Type . . . Hydrostatic, 1 pump, 2 motors with speed range select
 Travel speed:
 Measured with 20.5-25 tires

| | 1st | 2nd | 3rd | 4th |
|---------------------------------|--------------------|--------------|--------------|--------------|
| Both Forward and Reverse | 4.0 - 13.0 km/h | 13.0 km/h | 18.0 km/h | 38.0 km/h |

Measured with 17.5-25 tires

| | 1st | 2nd | 3rd | 4th |
|---------------------------------|--------------------|--------------|--------------|--------------|
| Both Forward and Reverse | 3.6 - 11.7 km/h | 11.7 km/h | 16.2 km/h | 34.2 km/h |



AXLES AND FINAL DRIVES

Drive system Four-wheel drive
 Front Fixed, semi-floating
 Rear Center-pin support, semi-floating,
 24° total oscillation
 Reduction gear Spiral bevel gear
 Differential gear Torque proportioning
 Final reduction gear Planetary gear, single reduction



BRAKES

Service brakes..... Hydraulically actuated,
 wet multiple-disc brakes actuate on four wheels
 Parking brake . . . Wet, multiple-disc brake on transfer output shaft
 Secondary brake..... Parking brake is commonly used



STEERING SYSTEM

Type..... Full-hydraulic power steering
 Steering angle38° each direction (40° end stop)
 Minimum turning radius at the center of outside tire 5175 mm



HYDRAULIC SYSTEM

Steering system:
 Hydraulic pump Gear type pump
 Capacity 110 L/min at rated rpm
 Relief valve setting18.6 MPa 190 kgf/cm²
 Hydraulic cylinders:
 Type Double-acting, piston type
 Number of cylinders.....2
 Bore x stroke 70 mm x 453 mm
 Loader control:
 Hydraulic pump Gear type pump
 Capacity78 L/min
 Relief valve setting20.6 MPa 210 kgf/cm²
 Hydraulic cylinders:
 Type Double-acting, piston type
 Number of cylinders-bore x stroke:
 Lift cylinder..... 2- 130 mm x 717 mm
 Bucket cylinder 1- 150 mm x 491 mm
 Control valve..... 2-spool type
 Control positions:
 Boom Raise, hold, lower, and float
 Bucket Tilt-back, hold, and dump
 Hydraulic cycle time (Rated load in bucket)
 Raise.....6.3 s
 Dump1.7 s
 Lower (Empty)3.6 s




SERVICE REFILL CAPACITIES

Cooling system 22 L
 Fuel tank 186 L
 Engine 23 L
 Hydraulic system..... 67 L
 Axle (Each front and rear) 18 L
 Torque converter and transmission 5 L



DIMENSIONS

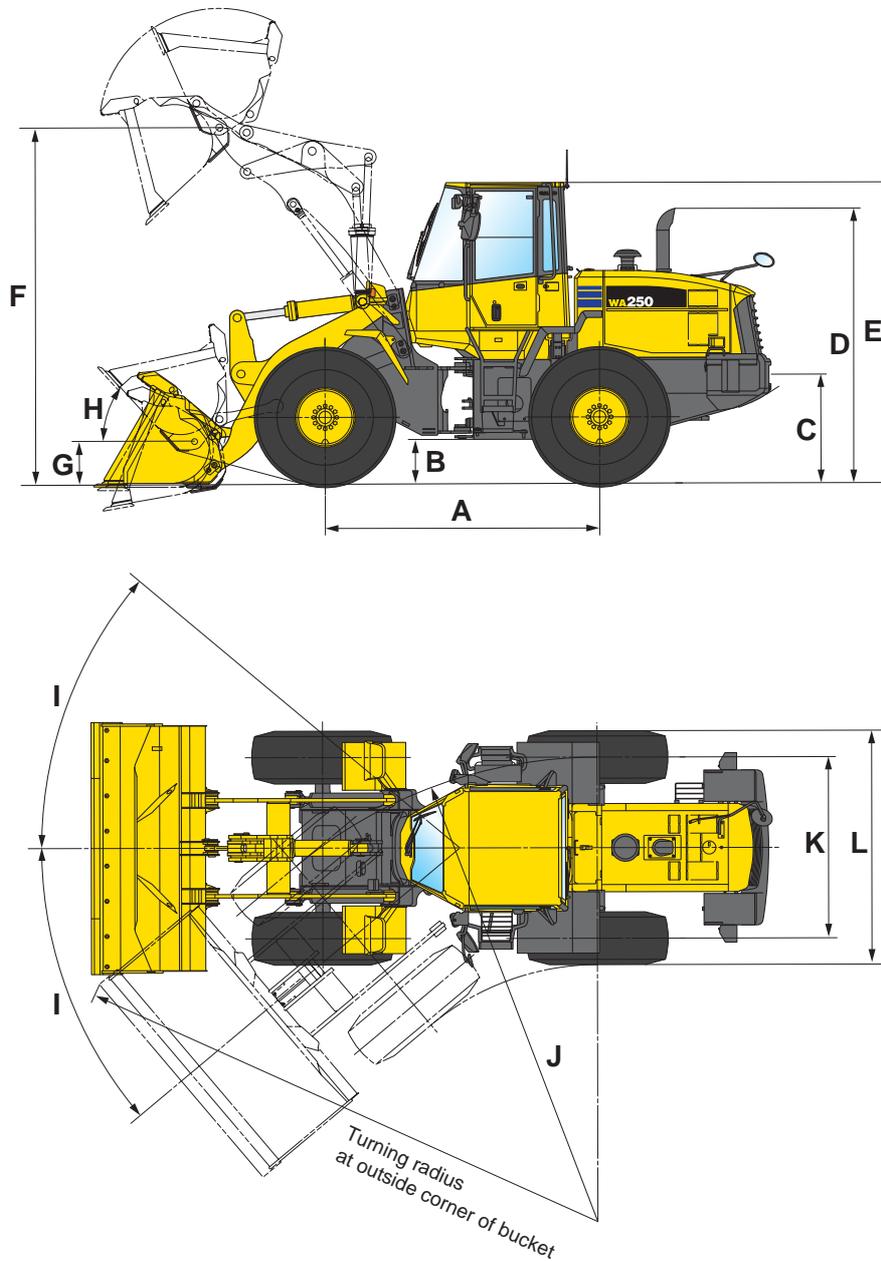

Measured with 20.5-25-12PR (L-3) tires

| | | Standard Boom | High Lift Boom |
|---|--|---------------|----------------|
| A | Wheelbase | 2900 mm | |
| B | Ground clearance | 465 mm | |
| C | Hitch height | 950 mm | |
| D | Overall height, top of stack | 2925 mm | |
| E | Overall height, top of ROPS cab | 3200 mm | |
| F | Hinge pin height, max. height | 3795 mm | 4390 mm |
| G | Hinge pin height, carry position | 450 mm | 615 mm |
| H | Max. tilt back angle, carry position | 48° | 50° |
| I | Steering angle, each direction | 38° | |
| J | Turning radius, center of outside tire | 5175 mm | |
| K | Tread | 1930 mm | |
| L | Width over tires | 2470 mm | |



DIMENSIONS

Measured with 20.5-25-12PR (L-3) tires

| | | Standard Boom | | | | |
|--|---------------|----------------------|--------------------|----------------------|--------------------|-----------------------|
| | | Stockpile Bucket | | Excavating Bucket | | Light Material Bucket |
| | | B.O.C.* ² | Teeth | B.O.C.* ² | Teeth | B.O.C.* ² |
| Bucket Capacity: | Heaped | 2.3 m ³ | 2.1 m ³ | 1.9 m ³ | 1.8 m ³ | 2.7 m ³ |
| | Struck | 2.0 m ³ | 1.8 m ³ | 1.6 m ³ | 1.5 m ³ | 2.3 m ³ |
| Bucket Width | | 2685 mm | 2705 mm | 2685 mm | 2705 mm | 2685 mm |
| Bucket Weight | | 960 kg | 865 kg | 905 kg | 810 kg | 1050 kg |
| Dumping Clearance, Max. Height and 45° Dump Angle ¹ | | 2850 mm | 2735 mm | 2925 mm | 2810 mm | 2755 mm |
| Reach at Max. Height and 45° Dump Angle ¹ | | 985 mm | 1070 mm | 910 mm | 995 mm | 1080 mm |
| Reach at 2130 mm Clearance and 45° Dump Angle | | 1490 mm | 1525 mm | 1450 mm | 1490 mm | 1540 mm |
| Reach with Arm Horizontal and Bucket Level | | 2230 mm | 2370 mm | 2125 mm | 2265 mm | 2360 mm |
| Operating Height (Fully Raised) | | 5065 mm | 5065 mm | 4945 mm | 4965 mm | 5200 mm |
| Overall Length | | 6995 mm | 7135 mm | 6890 mm | 7030 mm | 7125 mm |
| Loader Clearance Circle (Bucket at Carry, Outside Corner of Bucket) | | 12025 mm | 12115 mm | 11970 mm | 12060 mm | 12095 mm |
| Digging Depth: | 0° | 75 mm | 90 mm | 75 mm | 90 mm | 75 mm |
| | 10° | 265 mm | 305 mm | 245 mm | 285 mm | 285 mm |
| Static Tipping Load: | Straight | 11435 kg | 11530 kg | 11555 kg | 11650 kg | 11285 kg |
| | 40° Full Turn | 10060 kg | 10140 kg | 10165 kg | 10245 kg | 9925 kg |
| Breakout Force | | 12340 kg | 10830 kg | 13850 kg | 12010 kg | 11000 kg |
| Operating Weight | | 11395 kg | 11300 kg | 11340 kg | 11245 kg | 11485 kg |


| | | High Lift Boom | |
|--|---------------|----------------------|--------------------|
| | | Excavating Bucket | |
| | | B.O.C.* ² | Teeth |
| Bucket Capacity: | Heaped | 1.9 m ³ | 1.8 m ³ |
| | Struck | 1.6 m ³ | 1.5 m ³ |
| Bucket Width | | 2685 mm | 2705 mm |
| Bucket Weight | | 905 kg | 810 kg |
| Dumping Clearance, Max. Height and 45° Dump Angle ¹ | | 3520 mm | 3410 mm |
| Reach at Max. Height and 45° Dump Angle ¹ | | 940 mm | 1025 mm |
| Reach at 2130 mm Clearance and 45° Dump Angle | | 1955 mm | 2000 mm |
| Reach with Arm Horizontal and Bucket Level | | 2595 mm | 2735 mm |
| Operating Height (Fully Raised) | | 5540 mm | 5560 mm |
| Overall Length | | 7495 mm | 7635 mm |
| Loader Clearance Circle (Bucket at Carry, Outside Corner of Bucket) | | 12475 mm | 12575 mm |
| Digging Depth: | 0° | 80 mm | 95 mm |
| | 10° | 250 mm | 290 mm |
| Static Tipping Load: | Straight | 8065 kg | 8180 kg |
| | 40° Full Turn | 7015 kg | 7115 kg |
| | | | |
| Breakout Force | | 12715 kg | 11025 kg |
| Operating Weight | | 11875 kg | 11785 kg |

*1 At the end of tooth or Bolt on Cutting Edge (B.O.C.).
All dimensions, weights, and performance values based on ISO 7131 and 7546 standards.
Static tipping load and operating weight shown include lubricant, coolant, full fuel tank, ROPS (ISO 3471) cab, air conditioner and operator. Machine stability and operating weight affected by counterweight, tire size, and other attachments.
Apply the following weight changes to operating weight and static tipping load.

*2 Bolt on Cutting Edges



BUCKET SELECTION GUIDE

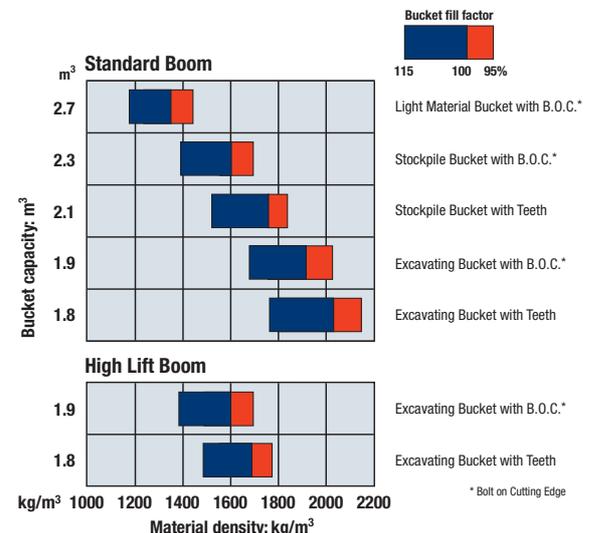



BUCKETS & ATTACHMENTS

■ Buckets

| Type | Feature | Image |
|------------------------------------|---|-------|
| Stockpile Bucket | This bucket is used for loading stockpile products, such as crushed rock and construction materials. | |
| Excavating Bucket | This bucket is used for excavating and loading blasted rock on rock crushing job sites, or for excavating natural ground. It has a flat-blade, straight cutting edge, and provides superior rigidity and wear resistance. | |
| Loose/Light Material Bucket | This bucket is used for loading materials with comparatively light specific gravity. It is based on the stockpile bucket, with a lengthened cutting edge and width to give increased capacity. | |

■ Cutting Edges and Teeth

| Type | Feature | Image |
|-----------------------------|---|---|
| Cutting Edges | This edge is made for use in loading loose sand and soil, or for loading stockpiled materials. It is bolted to the leading edge of stockpile buckets and may be detached and reversed. The cutting edges are manufactured from especially heat treated, high tension steel, and since they are reversible, both edges can be used. This effectively doubles their working life. | <p>Bolt on Cutting Edges (B.O.C.)</p> |
| Teeth (Bolt on Type) | These teeth are suitable for loading or excavation of piles of earth or sand, blasted rock, and jobs in the field that involve digging into the side of slopes. The special heat treated, tensile strength steel alloy used in their production assures that they will wear and have a long service life. | |
| Teeth (Tip Type) | These teeth tips which are attached to an adapter that is welded or bolted to the bucket edge. This means that an interchangeable part, the tooth tip, absorbs most of the wear and protects the actual bucket edge. They give excellent performance when used to handle blasted rock, piles of earth and similarly heavy duty tasks. | <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>Welded adapter</p> </div> <div style="text-align: center;"> <p>Bolt on adapter</p> </div> </div> |



WEIGHT / DIMENSIONS

| Tires/Attachments | Change in Operating Weight | Change in Tipping Load Straight | Change in Tipping Load Full Turn | Width Over Tires | Ground Clearance | Change in Vertical Dimensions |
|---|----------------------------|---------------------------------|----------------------------------|------------------|------------------|-------------------------------|
| 20.5-25-12PR (L-3) | 0 kg | 0 kg | 0 kg | 2470 mm | 465 mm | 0 mm |
| 20.5-25-12PR (L-2) | -150 kg | -110 kg | -90 kg | 2470 mm | 465 mm | 0 mm |
| 17.5-25-16PR (L-3) | -375 kg | -280 kg | -245 kg | 2375 mm | 395 mm | 70 mm |
| Install ROPS (ISO 3471) Canopy (Instead of Cab) | -150 kg | -150 kg | -130 kg | | | |
| Install Additional Counterweight | 300 kg | 580 kg | 510 kg | | | |



STANDARD EQUIPMENT

ENGINE/POWER TRAIN:

- Engine, Komatsu SAA6D107E-1 diesel
- Engine shut-off system, electric
- Fuel pre-filter with water separator
- Service brakes, wet multiple-disc type
- Transmission (Hydrostatic with speed range select), automatic
- Wet disc parking brake

ELECTRICAL SYSTEM:

- Alternator, 60 A
- Back-up alarm
- Batteries, 2 x 12 V/110 Ah
- Lights
 - 4 front, 2 rear
 - Back up
 - Turn signal with hazard
- Starting motor, 24 V/4.5 kW

HYDRAULIC SYSTEM:

- 2-spool valve for boom and bucket controls
- Hydraulic driven fan with reverse rotation
- Hydraulic oil cooler
- Lift cylinders and bucket cylinder

CAB:

- Air conditioner
- Auto shift transmission with mode select system
- Cigarette lighter (24 V) and ashtray
- Floor mat
- Front & rear window washer and wiper
- Main monitor panel with Equipment Management Monitoring System
- PPC hydraulic control, mono lever
- Rear heated glass (Electric)

- Rear under view mirror
- Rear view mirror for cab
- ROPS/FOPS (ISO 3471/ISO 3449) cab
- Seat, rigid type with reclining
- Seat belt
- Steering wheel, tiltable
- Sun visor

WORK EQUIPMENT:

- Bucket positioner
- Counterweight
- Loader linkage with standard lift boom

OTHER EQUIPMENT:

- Radiator mask, lattice type
- Tires (20.5-25-12PR, L-3 tubeless)



OPTIONAL EQUIPMENT

ENGINE/POWER TRAIN:

- Additional fuel filter with water separator
- Engine pre-cleaner with extension
- Limited slip differential (Front & rear)
- Power train guard
- Wide core radiator

ELECTRICAL SYSTEM:

- 12 V outlet
- Batteries, large capacity
- Battery disconnect switch

HYDRAULIC SYSTEM:

- 3-spool valve
- Hydraulic driven fan with automatic reverse rotation
- Secondary steering (SAE)

CAB:

- AM/FM radio
- AM/FM stereo radio cassette
- Cool & heater box
- Deluxe suspension seat
- ROPS (ISO 3471) canopy

WORK EQUIPMENT:

- Additional counterweight
- Bolt on Cutting Edge (B.O.C.)
- Boom kick-out
- Bucket teeth (Bolt-on type)
- Bucket teeth (Tip type)
- High lift boom

OTHER EQUIPMENT:

- Electronically Controlled Suspension System
- Fire extinguisher
- Front fenders
- Ordinary spare parts
- Rear full fenders
- Rear view monitoring system
- Tool kit
- Vandalism protection kit

KOMATSU TOTAL SUPPORT**Komatsu Total Support**

To keep your machine available and minimize operation cost when you need it, Komatsu Distributor is ready to provide a variety of supports before and after procuring the machine.

Fleet recommendation

Komatsu Distributor can study the customer's job site and provide the most optimum fleet recommendation with detailed information to meet all of your application needs when you are considering to buy new machines or replace the existing ones from Komatsu.

Product support

Komatsu Distributor gives the proactive support and secures the quality of the machinery that will be delivered.

Parts availability

Komatsu Distributor is available for emergency inquiry by the customers for genuine, quality guaranteed Komatsu parts.

Technical support

Komatsu product support service (Technical support) is designed to help customer. Komatsu Distributor offers a variety of effective services to show how much Komatsu is dedicated to the maintenance and support of Komatsu machine.

- Preventive Maintenance (PM) clinic
- Oil & Wear analysis program

Repair & maintenance service

Komatsu Distributor offers quality repair and maintenance service to the customer, utilizing and promoting Komatsu developed programs.

Komatsu Reman (Remanufactured) components

Komatsu Reman products are the result of the implementation of the Komatsu global policy which establishes and agrees to reduce the owning, operating and total Life Cycle Costs (LCC) to Komatsu's customer through high quality, prompt delivery and competitively priced in own remanufactured products (QDC).



